


HUS 重力型

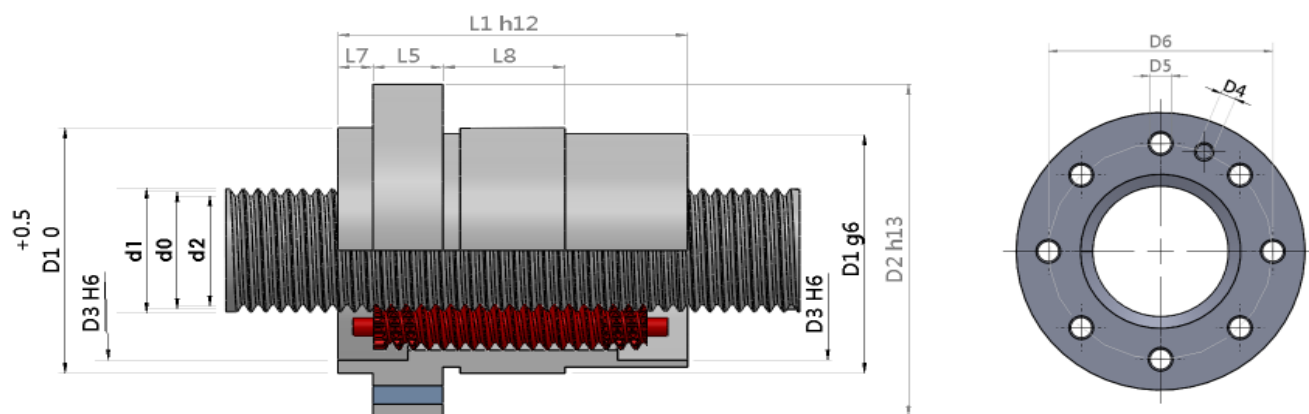


型號	D x P		η	η'	kN	kN	mm	mm	mm	mm	mm	mm	mm	mm	mm	
					Co	Co a	D1	D2	D3	D4	D5	D6	L1	L5	L7	L8
HUS	60	15	0.88	0.87	655	1512	122	180	110	M8x1	17.5	150	171	30	20	40
		20	0.89	0.88	656	1498										
		25	0.89	0.88	665	1522										
		30	0.88	0.87	651	1469										
HUS	75	15	0.87	0.85	842	2429	150	210	136	M8x1	17.5	180	213	35	25	40
		20	0.88	0.87	862	2480										
		25	0.89	0.88	767	2462										
		30	0.89	0.88	858	2395										
HUS	87	15	0.86	0.84	1074	3531	175	235	158	M8x1	17.5	200	245	40	25	40
		20	0.88	0.86	1987	3510										
		25	0.89	0.87	1106	3515										
		30	0.89	0.88	1099	3467										
HUS	99	15	0.85	0.82	1301	4708	200	245	180	M8x1	17.5	224	280	50	25	40
		20	0.87	0.85	1323	4716										
		30	0.89	0.87	1354	4732										
		35	0.89	0.88	1347	4642										
HUS	112	15	0.84	0.80	1440	5442	230	285	210	M10x1	17.5	260	300	50	30	60
		20	0.86	0.84	1460	5415										
		30	0.88	0.87	1483	5361										
		35	0.87	0.88	1482	5299										
HUS	120	15	0.83	0.79	1599	6370	240	300	220	M10x1	17.5	270	346	55	40	60
		20	0.86	0.83	1634	6419										
		30	0.88	0.87	1648	6283										
		35	0.89	0.87	1669	6332										

D 參考螺桿徑 P 導程 Co 動態負荷 Coa 靜態負荷

η 直接效率 η' 間接效率 d0 有效徑 d1 牙外徑 d2 牙底徑

HUS 重力型

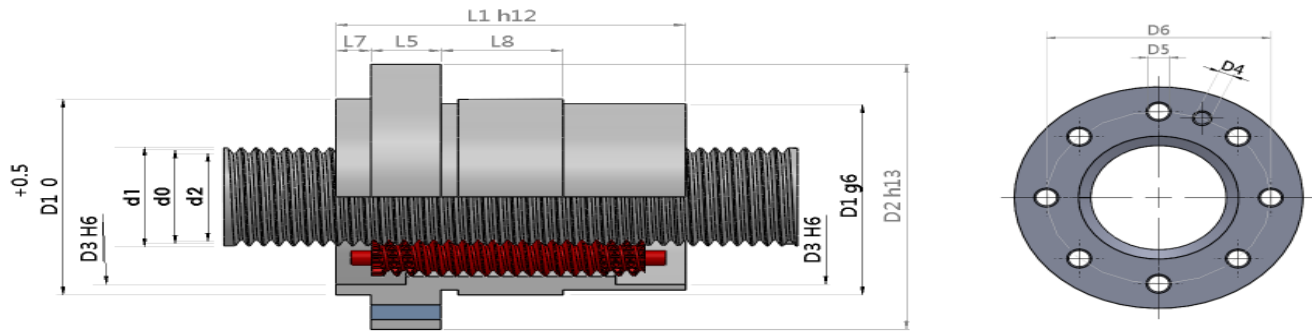

型號	D x P		η	η'	kN	kN	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
					Co	Co a	D1	D2	D3	D4	D5	D6	L1	L5	L7	L8
HUS	135	15	0.82	0.77	1843	8037	280	345	260	M12*1.75	20 26	315	370	60	35 60	80
		20	0.85	0.82	1858	7922										
		30	0.88	0.86	1904	7943										
		40	0.89	0.87	1909	7796										
		50	0.89	0.88	1944	7901										
HUS	150	15	0.80	0.75	2235	10488	320	385 410	280	M12*1.75	20 26	355 365	412	70 80	50 65	80
		20	0.84	0.80	2155	9675										
		30	0.87	0.85	2181	9506										
		40	0.88	0.87	2218	9531										
		50	0.89	0.88	2216	9362										
HUS	180	15	0.78	0.71	3173	17366	390	470	330	M12*1.75	24 26	433	528	90	55 96	100
		20	0.82	0.77	3204	17663										
		30	0.86	0.83	3101	16220										
		40	0.88	0.86	3155	16249										
		50	0.89	0.87	3195	16278										
HUS	210	20	0.80	0.74	3771	22164	440	530	398	M12*1.75	26 24*22	490	570	100	55 100	100
		30	0.84	0.81	3893	22704										
		40	0.87	0.85	3723	20709										
		50	0.88	0.86	3773	20743										
HUS	240	25	0.81	0.76	3919	23387	490	560	448	M12*1.75	26	520	600	100	100	100
		30	0.83	0.79	3931	23089										
		40	0.86	0.83	3808	21497										
		50	0.87	0.85	3860	21536										

D 參考螺桿徑 P 導程 Co 動態負荷 Coa 靜態負荷
 η 直接效率 η' 間接效率 d0 有效徑 d1 牙外徑 d2 牙底徑